

EDK4

VANDAL-PROOF READER

white cover
available



EDK4B



EDK4

Both contactless media and contact chips reader for outdoor use. Very resistant to damage due to special matter filling the casing of the reader. Casing IP 56 enables direct use of the reader outdoors.

Optional output data format ACS-line or WIEGAND, desired mode is selectable directly on the device.

Product Code	Description
EDK4	Contact DALLAS Chips Reader, vandal-proof construction
EDK4B	Contactless Reader, vandal-proof construction

- Standard color: black
- Wall mounting holder included




**ELECTRONIC
IDENTIFICATION
SYSTEM**

Producer: ESTELAR s. r. o.
Samostatnost 1181, 769 01 Holešov, Czech Republic
phone: +420 573 394 894, e-mail: sales@estelar.cz

www.acsline.com

TECHNICAL SPECIFICATION

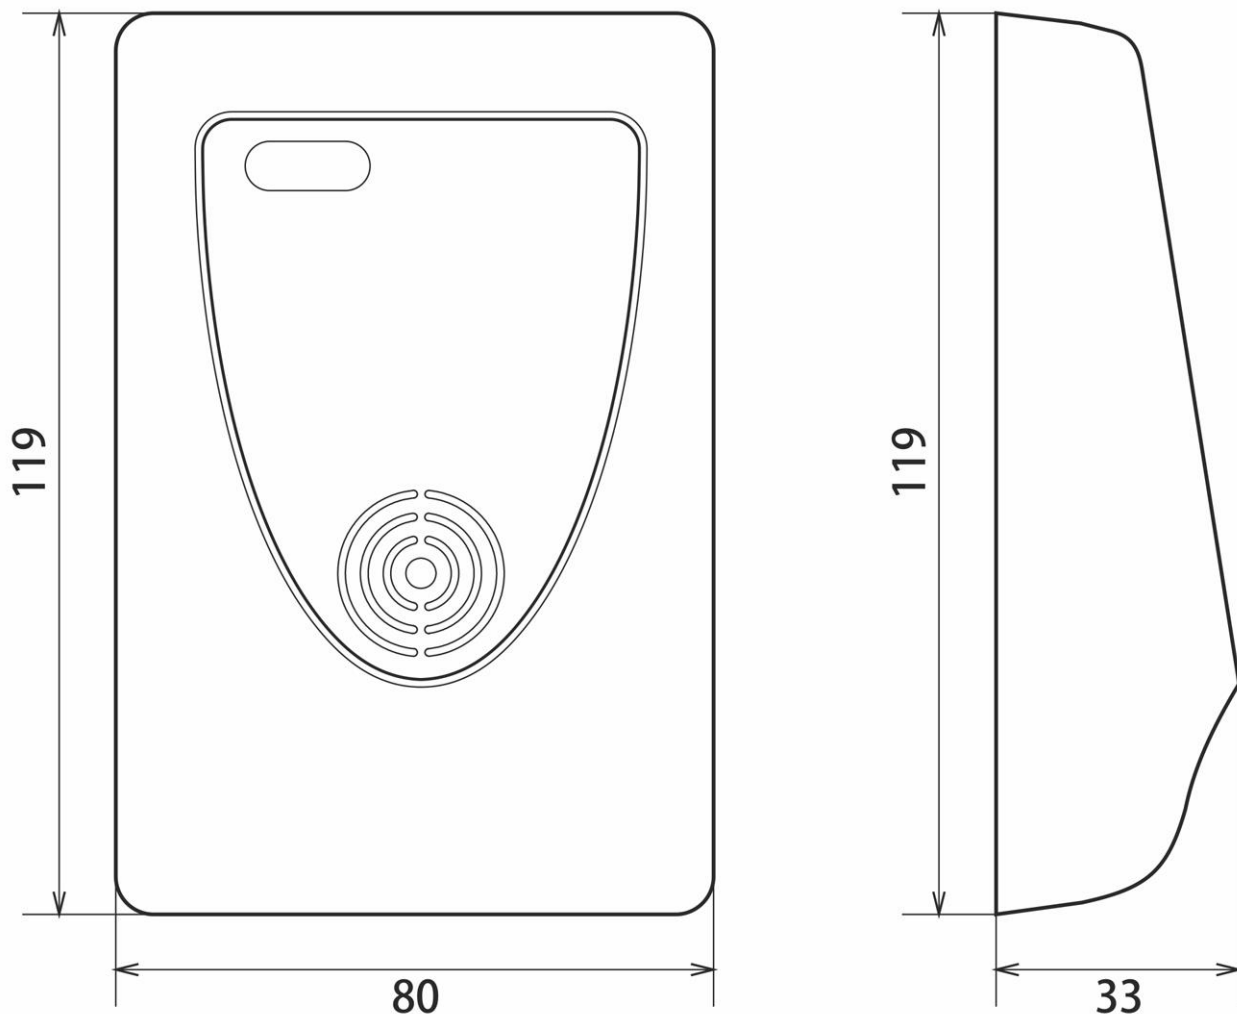

Type designation	EDK4	EDK4B
Power Supply	DC 12V	DC 12V
Input Current	max. 20 mA @ 12V	max. 30 mA @ 12V
ID medium	Dallas DS1990A-F5	EM40xx, EM41xx (125kHz)
Size (h x w x d)	119 x 80 x 35 mm	119 x 80 x 33 mm
Casing	IP55	IP55
Working temperature	-25 °C to +65 °C	-25 °C to +65 °C
Data output	RS232 TTL (ASCII), Wiegand 26	RS232 TTL (ASCII), Wiegand 26
Connection length	max. 10 m, for Wiegand max. 30 m	max. 10 m, for Wiegand max. 30 m
Color design	black, white	black, white