


Features

- Connection of up to 32 readers
- Reader distance up to 1,200 m
- Diagnostic LED diodes
- Universal internal relay
- Inputs for door contacts
- Inputs for exit buttons
- Programmable PGM outputs
- Outputs for EZS control
- Tamper contact against case opening
- Both ON-LINE and OFF-LINE operation

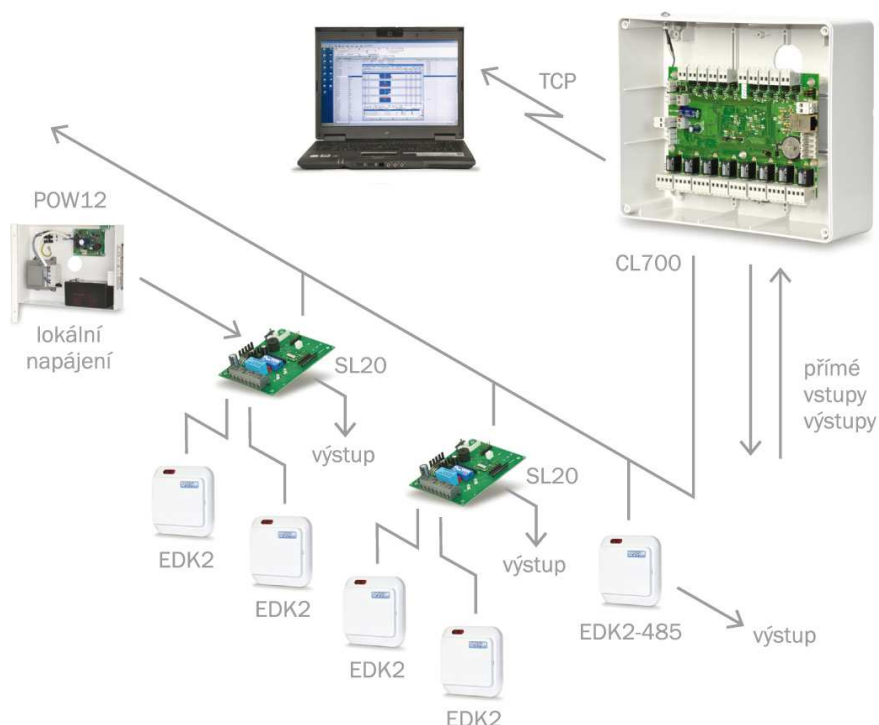

Central processing unit for building large scale access systems ■ Also usable as a controller for minor bus RS485, able to house up to 32 readers ■ Doorlock control relays are located in readers or in separate door modules to achieve greater security ■ Allows ON-LINE monitoring or remote control for each entry point ■ All the configuration is done from PC via LAN network ■ Typically used in office buildings with many entrances or hotel access systems ■ Works with any ID media according to connected readers.

Product Code	Description
CL700	Control Unit for 16 readers on RS485 or up to 32 EDK readers via door modules SL20, ETHERNET interface
EDK2B-485	Contactless Reader for connection on RS485 bus, includes internal relay
SL20	Door Module for connection of 2 END readers or 1 WIEGAND reader on RS485 bus, 2 relays, input for door contact, local power supply possible

